


## KST

"KST" series stainless steel digital scales with touch screen display

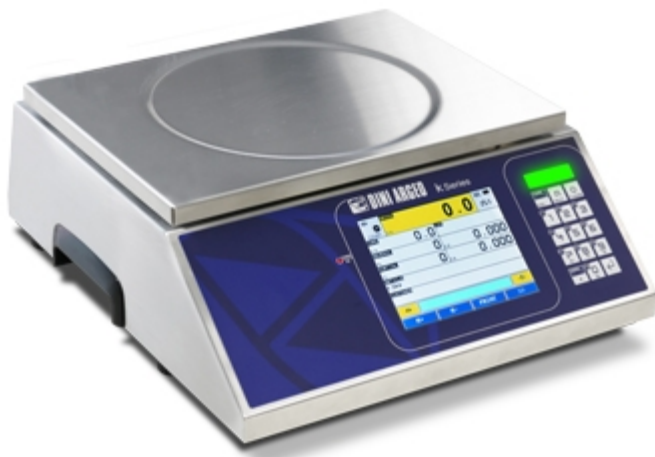

New bench digital scales with stainless steel body and touch screen color display, simple and intuitive. High weighing performances, thanks to the C6 OIML load cells (fitted as standard) and selectable application programmes for piece counting, statistical control, manual dosage, labelling and totalization. The long lasting battery power supply and the lateral handles allow an easy transport of the scale directly where it is necessary.

The best solution  
for advanced industrial  
applications

## DIGITAL SCALES: TECHNICAL FEATURES

- STAINLESS steel digital scales body, resistant and easy to clean.
- Stainless steel load plate, inspectionable and easily cleanable. Dimensions: 250x340mm.
- OIML R60 C6 approved aluminium [load cells](#).
- Possibility of connection to one remote scale via serial, or of additional platforms (up to 3).
- Backlit graphic display with touch screen technology, lxh= 120x90mm size. Screens completely customizable.
- 3-colors control light.
- Waterproof keyboard and multifunctional programme.
- IP44 protection.
- Non-slip adjustable feet.
- Ergonomic lateral handle.
- Level positioned under the plate.
- Serial port RS232 for connection to PC or printer.
- Digital scale power supply: internal rechargeable battery (operating time 40h approximately) or external power supply/battery charger.

## DIGITAL SCALES: AVAILABLE APPLICATION PROGRAMMES

- The application programme of the KST digital scales series can be chosen according to the function to carry out:
  - AF01: Totalization and formulation (standard)
  - AF02: Piece counting/quantity (optional)
  - AF04: Statistic control of prepackaged goods (optional)
  - AF05: Weight / price industrial labelling (optional)
  - BATCH: Multicomponent manual dosage with archive of formulas (optional)

## MAIN CERTIFICATIONS OF THE KST SCALES

- The main certifications of KST scales are:
  - EC Type Approval (EN45501)
  - OIML R76

## DIGITAL SCALES: I/O SECTION

- 2 Serial ports RS232, for connection to printer, PC or PLC, radio module and optional interfaces.
- 1 Serial ports RS232 (RS485 optional), for connection to repeater, remote scale, badge reader or digital load cell.
- Fitted with keyboard emulation input, for connection to barcode/badge reader or PC external keyboard, through cable with mini DIN connector (optional).
- 4 opto-isolated outputs (optional).
- 2 opto-isolated inputs (optional).
- External Profibus interface (optional), for automation management.
- Modbus RTU interface.
- Optional Bluetooth connection, for wireless rapid archive configuration by PC, tablet or smartphone.

DETAIL 1



DETAIL 2



DETAIL 3



DETAIL 4



## VERSIONS

### Versioni disponibili

Codice	Max (kg)	d (g)	<b>M</b> 2R (g) *
KST6	3/6	0,5/1	0,5/1
KST30	12/30	2/5	2/5

(\*) Divisioni CE-M ottenibili solo con le relative opzioni.



PHOENIX SCALES LTD

34 OLDBURY ROAD WEST MIDLANDS - B70 9ED - WEST BROMWICH - UNITED KINGDOM

Tel. 0044 121 520 9048

Fax. 0044 121 557 4006

E-mail [sales@phoenixscales.co.uk](mailto:sales@phoenixscales.co.uk)

Web [www.phoenixscales.co.uk](http://www.phoenixscales.co.uk)